


LED PROFILES 5

Product Images

APPLICATION AREAS:

Office buildings, Retail, Supermarkets, Hospitality, Libraries

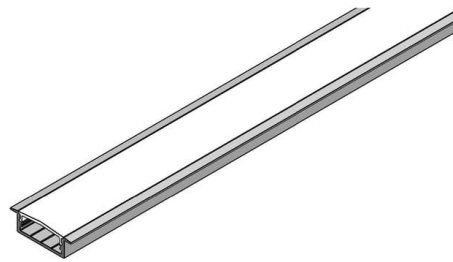

Tailor Made

80

CRI



Smart Lighting



CCT Tuning



Dimming
Optional

TECHNICAL SPECIFICATIONS

PRODUCT REFERENCE

ITEM CODE	AR0052310R
ENVIRONMENT	Indoor
INSTALLATION	Recessed

CONSTRUCTION AND MATERIALS

SIZE OUT SIDE MM	2000x31x10
CUT OUT SIZE (MM)	2000x23x10
HOUSING	Extruded Aluminium
LENS / DIFFUSER	High Transmission PMMA
REFLECTOR	N/A
SURFACE FINISH	Anodised/Custom Powder Coated
IP rating	20

THERMAL MANAGEMENT

HEAT SINK MATERIAL	Aluminium
COOLING TECHNIQUE	Passive

OPTICAL SYSTEM

BEAM ANGLE	110°
ILLUMINATION MODE	Indirect Lighting
SWIVEL	No

LIGHT TECHNOLOGY

LED FITTED	NA
DELIVERED LUMENS	NA
CCT (K)	NA
Tunable	NA
LED BINNING	NA
CRI (Ra)	NA
LED LIFE L70	NA
LUMINAIRE	NA
LUMINOUS FLUX	NA
LUMINOUS EFFICACY	NA

ELECTRICAL SYSTEM

(UGR)	NA
INPUT VOLTAGE	NA
INPUT POWER	NA
POWER FACTOR	NA
THD	NA
CONTROL GEAR	NA
MOUNTING	NA
DRIVER PROTECTION	NA
DIMMING	NA
EMERGENCY BATTERY BACKUP	NA


PACKAGING DETAILS

PACKING QTY -


GROSS WEIGHT -

CARTOON SIZE -
(LXBXH)

DIMENSIONS

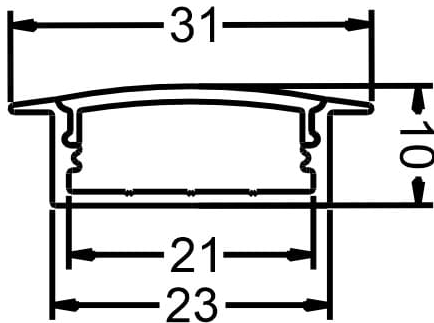

PHOTOMETRIC

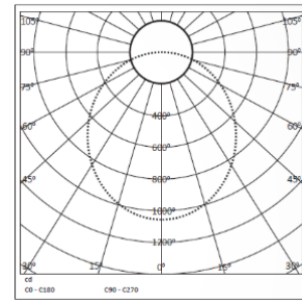

ARCADE LIGHTING INDUSTRIES PVT LTD

8 Raju industrial estate, Penkar pada, Near
dahisar check naka, Mira road 401107

NOTE : The technical data sheet with design registration stamp is the property of Arcade Lighting India Pvt. Ltd. & protected under Intellectual Property law, and it is restricted for sharing with other lighting suppliers

Technical parameters are subjected to change time to time in order to improve product performance and reliability

BP-RV00 AR/FRT/TEC/TDS/01