

ASPIRE UP DOWN

Product Images

APPLICATION AREAS:

Office buildings,Retail,Supermarkets,Hospitality,liberar





TECHNICAL SPECIFICATIONS

PRODUCT REFRENCE

ITEM CODE ENVIRONMENT INSTALLATION ASPIRE UP DOWN 15 Indoor Suspended

CONSTRUCTION AND MATERIALS

SIZE OUT SIDE MM CUT OUT SIZE (MM) HOUSING LENS / DIFFUSER

REFLECTOR SURFACE FINISH 599x51x90 -Extruded Aluminium High Transmission

PMMA N/A White/Black/Custom Powder Coated

THERMAL MANAGEMENT

HEAT SINK MATERIAL Aluminium COOLING TECHNIQUE Passive

OPTICAL SYSTEM

BEAM ANGLE110°ILLUMINATION MODEDirect LightingSWIVELNo

LIGHT TECHNOLOGY

ELECTRICAL SYSTEM


LED FITTED DELIVERED LUMENS CCT (K) Tunable	Bridgelux 1500 / 1425 / 1350 6000 / 4000 / 3000 On Request	(UGR) INPUT VOLTAGE INPUT POWER POWER FACTOR THD CONTROL GEAR	<22 220 TO 240 Vac 15W (6U+9D) >0.95 <10% IN BUILT
LED BINNING CRI (Ra) LED LIFE L70 LUMINAIRE LUMINOUS FLUX	3 Step MacAdam 80 / 90 45,000 HRS 2100 / 2025 / 1950	MOUNTING DRIVER PROTECTION DIMMING EMERGENCY BATTERY	OVP,Short Circuit,Surge Phase / Analog / Dali / RF / APP On Request
LUMINOUS EFFICACY	100 Lumens / Watt	BACKUP	On Request

PACKAGING DETAILS

PACKING QTY 4

GROSS WEIGHT

CARTOON SIZE 48.75"x8.5"x4" (LXBXH)

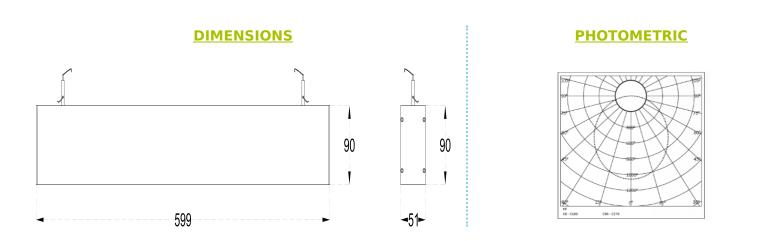

ARCADE LIGHTING INDUSTRIES PVT LTD

8 Raju industrial estate, Penkar pada, Near dahisar check naka, Mira road 401107

NOTE : The technical data sheet with design registration stamp is the property of Arcade Lighting India Pvt. Ltd. & protected under Intellectual Property law, and it is restricted for sharing with other lighting suppliers