

## HIGHBAY (SMD)

Product Images

### APPLICATION AREAS:

Sports facilities, Studio,  
Stage, Supermarkets, Industrial buildings



## TECHNICAL SPECIFICATIONS

### PRODUCT REFERENCE

<b>ITEM CODE</b>	HIGHBAY (SMD) 150
<b>ENVIRONMENT</b>	OUTDOOR WALL MOUNTED
<b>INSTALLATION</b>	MOUNTED

### CONSTRUCTION AND MATERIALS

<b>SIZE OUT SIDE MM</b>	-
<b>CUT OUT SIZE (MM)</b>	-
<b>HOUSING</b>	Die Cast Aluminium
<b>LENS / DIFFUSER</b>	Tempered Glass
<b>REFLECTOR</b>	N/A
<b>SURFACE FINISH</b>	GREY POWDER COATED

### THERMAL MANAGEMENT

<b>HEAT SINK MATERIAL</b>	Aluminium
<b>COOLING TECHNIQUE</b>	Passive

### OPTICAL SYSTEM

<b>BEAM ANGLE</b>	110°
<b>ILLUMINATION MODE</b>	Indirect Lighting
<b>SWIVEL</b>	No

## LIGHT TECHNOLOGY

<b>LED FITTED</b>	Bridgelux
<b>DELIVERED LUMENS</b>	3150 / 3000 / 2850
<b>CCT (K)</b>	6000 / 4000 / 3000
<b>Tunable</b>	On Request
<b>LED BINNING</b>	3 Step MacAdam
<b>CRI (Ra)</b>	80 / 90
<b>LED LIFE L70</b>	45,000 HRS
<b>LUMINAIRE</b>	2100 / 2025 / 1950
<b>LUMINOUS FLUX</b>	
<b>LUMINOUS EFFICACY</b>	130 Lumens / Watt

## ELECTRICAL SYSTEM

<b>(UGR)</b>	<18
<b>INPUT VOLTAGE</b>	220 TO 240 Vac
<b>INPUT POWER</b>	150W
<b>POWER FACTOR</b>	>0.95
<b>THD</b>	<10%
<b>CONTROL GEAR</b>	IN BUILT
<b>MOUNTING</b>	
<b>DRIVER PROTECTION</b>	OVP, Short Circuit, Surge
<b>DIMMING</b>	OPTION/AL
<b>EMERGENCY</b>	On Request
<b>BATTERY BACKUP</b>	


## PACKAGING DETAILS

**PACKING QTY**


**GROSS WEIGHT**

**CARTON SIZE  
(LXBXH)**

## DIMENSIONS

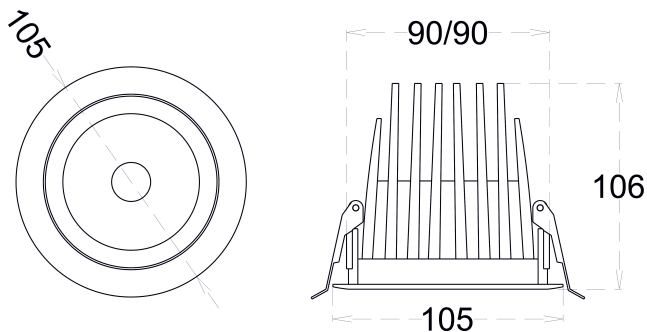

## PHOTOMETRIC



## **ARCADE LIGHTING INDUSTRIES PVT LTD**

8 Raju industrial estate, Penkar pada, Near  
dahisar check naka, Mira road 401107

**NOTE :** The technical data sheet with design registration stamp is the property of Arcade Lighting India Pvt. Ltd. & protected under Intellectual Property law, and it is restricted for sharing with other lighting suppliers

Technical parameters are subjected to change time to time in order to improve product performance and reliability

BP-RV00 AR/FRT/TEC/TDS/01